

풀하이트 턴스타일 게이트 시리즈

FHT2300 : 풀하이트 턴스타일 게이트

FHT2311 : RFID를 포함한 풀하이트 턴스타일 게이트

FHT2322 : 지문 및 RFID를 포함한 풀하이트 턴스타일 게이트

반자동 회전식

SUS304 stainless
steel

LED 안내판

모듈형 설계



Application



Industrial facility



Corporate security



Government security




Public transportation

Specifications

Power Requirements		AC110V/220V, 50/60Hz
Working Temperature		-28°C to 60°C
Working Humidity		25% to 75%
Working Environment		Indoor/Outdoor
Speed of Throughput	RFID	Maximum 20/minute
	Fingerprint	Maximum 15/minute
Lane Width		560 mm
Footprint (L*W)		1400*1395(mm)
Dimension (L*W*H)		1400*1395*2220 (mm)
Dimension with Packing (L*W*H)		1520*1200*2320(mm)
Net Weight (kg)		220kg
LED Indicator		Supports
Cabinet material		SUS304 Stainless Steel
Barrier Material		SUS304 (optional: SUS316)
Barrier Movement		Rotating
Emergency Mode		Supports
Security Level		High
MCBF		1 million
Ingress Protection		IP54
Warranty		1 year

Dimensions (mm)

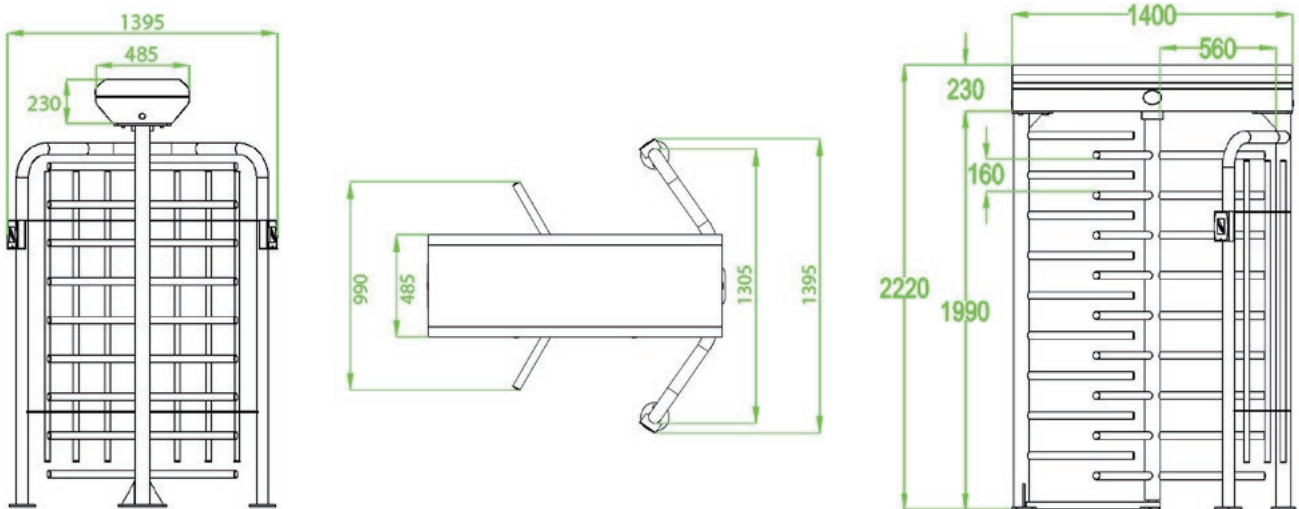

To prevent the corrosion of stainless steel, we recommend not to use in highly corrosive environments, such as sea-side, chemical plants and saline-alkali soils.

